




- Pumps**
- Filter devices**
- Filter media**
- Monitoring**
- Installation**

Mechanical sealed pumps



Mechanical sealed pump

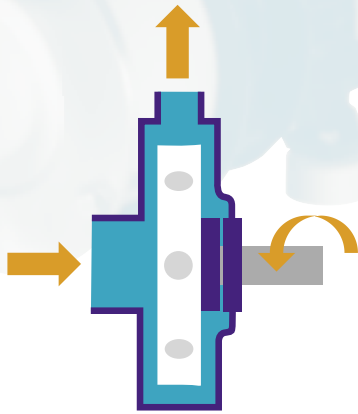

- Suitable for electroplating solutions
- Recommended for abrasive as well as with metals polluted liquids.
- Simple construction guarantees a long lifetime
- Easy to handle
- Available in PP and PVDF
- Seal made of ceramic and/or impregnated carbon
- O-Rings available in different materials like Nitril®, CSM®, EPDM®, Viton®. So there is an answer for each requirement.
- Not suitable for chemical (electro less) nickel, copper, gold or palladium

One way or the other.
This pump fits to your application




Front sight CW
Drive motor running clockwise



Front sight AW
Drive motor running anti clockwise

Features

- Machined from solid thermal pre treated material
- Metal parts all SS
- PP up to 80°C/176°F, PVDF 100°C/212°F
- Standard drive motor according DIN / EN
- Drive motor 2 times coated with 2 compound acrylic
- IP54 / TEFC
- Only a different impellor for the two versions.

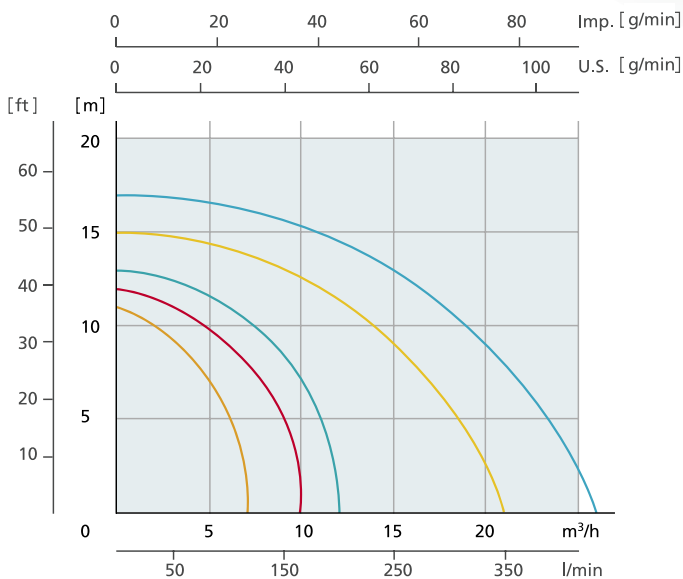

Type	IBT-055	IBT-075	IBT-110	IBT-150	IBT-220
Motor	0,55 kW 3/4 hp	0,75 kW 1 hp	1,10 kW 1 1/2 hp	1,50 kW 2 hp	2,20 kW 3 hp
Density	1,3	1,3	1,3	1,3	1,3
Inlet					
Fitting	G 2"	G 2"	G 2 1/4"	G 2 3/4"	G 2 3/4"
d/DN (mm)	40/32	40/32	50/40	63/50	63/50
Outlet					
Fitting	G 1 1/2"	G 1 1/2"	G 2"	G 2 1/4"	G 2 1/4"
d/DN (mm)	32/25	32/25	40/32	50/40	50/40



Inbotech B.V.
P.O. Box 9
8754 ZN Makkum
Netherlands

Telephone: +31 (6) 53 70 81 99
Fax: +31 (0)517-532388

E-Mail: info@inbotech.com
Internet: www.inbotech.com